

# Chieftain® X

Graphite reinforced with  
aramid fibre and nitrile binder

**Chieftain® X is a high performance sheet jointing based on graphite reinforced with aramid fibres with a nitrile (NBR) binder, and complies with the test requirements of BS7531 Grade X.**


The unique blend of aramid fibres and graphite results in a gasket material with exceptional leakage resistance and residual stress levels. The material is supplied with an anti-stick finish to both surfaces as standard, which minimises adhesion of the gasket to flange surfaces even at elevated temperatures, resulting in reduced removal time.

## Application Guidelines

- A soft cut gasket for extreme applications in general industry
- Media compatibility with oils, fuels and hydrocarbon compounds
- Can be used on the majority of flange specifications including ASME, API, EN, BS and DIN
- Excellent resistance to acids, alkalis, solvents, refrigerants, water and steam

## TA Luft

Complies with the tightness criteria of  $10^{-4}$  mbar.l/m.s of VDI Guideline 2200 and VDI Guideline 2440.

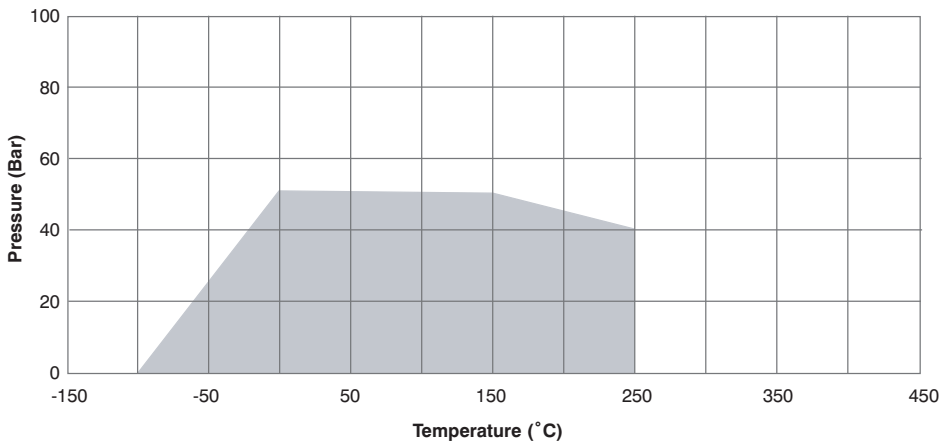

## Pressure versus temperature capability graph

Pressure x Temperature curve indicates the service limits considering the simultaneous influence of temperature and pressure. The shaded area represents the normal service limits for non-critical media (excluding steam) for 2 mm thick material.

For other thicknesses these limits may vary. James Walker would strongly suggest that for all applications that fall outside of the shaded area you seek guidance from James Walker to assess the suitability of the material in your specific application.

Media compatibility has not been assumed and may influence the service limits in a specific application. Please contact James Walker for confirmation of suitability.



## TEMPERATURE

Maximum Temperature:  
+450°C (+842°F)

Minimum Temperature:  
-200°C (-328°F)



## PRESSURE

Maximum Pressure:  
10 MPa/100 bar (1450 psi)  
ASME B16.5 Class 600

# Chieftain<sup>®</sup> X

Graphite reinforced with  
aramid fibre and nitrile binder

## Typical physical properties

Property	Test method	Parameters	Typical physical property
Colour	-	-	Black
Density	DIN 28090-2	-	1.65g/cm <sup>3</sup>
Compressibility	ASTM F36J	34.5 MPa	10%
Recovery	ASTM F36J	34.5 MPa	50%
Tensile strength (Transverse)	DIN 52910	-	9 MPa (1300 psi)
Residual stress	DIN 52913 (2 mm Thickness Sample)	175°C / 50 MPa	34 MPa (5510 psi)
		300°C / 50 MPa	30 MPa (4060 psi)
	BS 7531 (1.5 mm Thick Sample)	300°C / 40 MPa	34 MPa (4790 psi)
Leachable chloride content	ISO 10304-1		< 100 ppm

## Typical performance

Leakage rate	DIN 3535-6	N <sub>2</sub> , 40 bar	< 0.1 mg/m/s
--------------	------------	-------------------------	--------------

Fluid resistance (2 mm sample)			
IRM 903 weight change	ASTM F146	5 Hr@150°C	12%
IRM 903 thickness change		5 Hr@150°C	5%
ASTM fuel B weight change	ASTM F146	5 Hr@23°C	10%
ASTM fuel B thickness change		5 Hr@23°C	5%

*Gasket material performance is ultimately dependent on the use of the correct flange design standards and fitting procedures plus appropriate gasket design and manufacturing process.*

## Availability

Sheet size	Thickness
2000 mm x 1480 mm; Other sizes can be considered upon request	0.8, 1.0, 1.5, 2.0, 3.0 mm

# James Walker Worldwide

## Australia

**T:** +61 2 9721 9500  
**E:** sales.jwau@jameswalker.biz

## Belgium

**T:** +32 3 820 79 00  
**E:** sales.be@jameswalker.biz

## Brazil

**T:** +55 11 4392 7360  
**E:** sales.br@jameswalker.biz

## China

**T:** +86 21 6876 9351  
**E:** sales.cn@jameswalker.biz

## France

**T:** +33 437 49 74 80  
**E:** sales.fr@jameswalker.biz

## Germany

**T:** +49 4038 60810  
**E:** sales.de@jameswalker.biz

## India

**T:** +91 224 0808080  
**E:** sales.in@jameswalker.biz

## Ireland

**T:** +353 214 323626  
**E:** sales.ie@jameswalker.biz

## Italy

**T:** +39 2 2578308  
**E:** sales.it@jameswalker.biz

## Middle East

**T:** +971 481 78888  
**E:** sales.jwme@jameswalker.biz

## Netherlands

**T:** +31 186 633111  
**E:** sales.nl@jameswalker.biz

## New Zealand

**T:** +64 9 272 1599  
**E:** sales.nz@jameswalker.biz

## Norway

**T:** +47 22 75 75 00  
**E:** sales.no@jameswalker.biz

## Singapore

**T:** +65 6715 6300  
**E:** sales.sg@jameswalker.biz

## South Africa

**T:** +27 31 304 0770  
**E:** sales.za@jameswalker.biz

## Spain & Portugal

**T:** +34 94 447 00 99  
**E:** sales.es@jameswalker.biz

## UK

**T:** +44 1270 536000  
**E:** sales.uk@jameswalker.biz

## USA

**T:** +1 708 754 4020  
**E:** sales.jwna.us@jameswalker.biz

Information given in this publication is given in good faith and represents the results of specific individual tests carried out by James Walker or third parties in accordance with the methodologies described in this publication, performed in a laboratory. No representation or warranty is given in relation to such information. Values and/or operating limits given in this publication are not an indication that these values and/or operating limits can be applied simultaneously. While such results may comprise useful additional information and are industry standard tests, they are no substitute for conducting (or procuring from James Walker) your own tests and engineering analysis and satisfying yourself as to the suitability of the product you select. Please also note that a product tested in accordance with the published methodology may not perform to such values in application and/or under different test conditions or methodologies for a variety of reasons, including but not limited to the environment in which it is used/tested or which passes through it or otherwise affects the product, or due to the handling, storage or installation, or due to the effect of housing or other parts. Our personnel will be happy to discuss any historical examples we have of a product having been previously used in a particular application.

To ensure you are working with the very latest product specifications, please consult the relevant section of the James Walker website: [www.jameswalker.biz](http://www.jameswalker.biz).

## James Walker Sealing Products & Services Ltd

Registered Office: Lion House, Oriental Road,  
Woking, Surrey GU22 8AP, United Kingdom.

Reg no: 00264191 England