

THE SOLUTION FOR THICK AND DIRTY COILS

CUSTOMER FAVORITE


IDEAL FOR CLEANING MICROCHANNELS



How dirty coils negatively affect cooling capacity and energy efficiency.

Dirty Evaporator Coils:
 UP TO **40%** REDUCED COOLING CAPACITY
 UP TO **35%** REDUCED ENERGY CAPACITY

Dirty Condenser Coils:
 UP TO **40%** REDUCED COOLING CAPACITY
 ABOUT **60%** REDUCED ENERGY EFFICIENCY

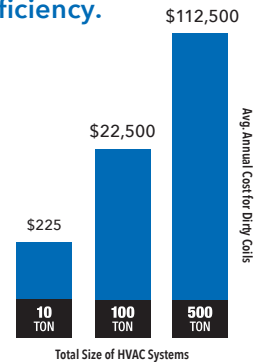

CE certification only applies to CC400-HF-A-50 model. PATENT PENDING

CC-400HF HiFlo® – Deep Clean

This innovative system delivers 400 PSI of cleaning power at 3 GPM to quickly and safely flush dirt, debris, biological growth, and more from thick evaporator and condenser coils. Traditional pressure washers damage coils with high-pressure spray.

The CoilPro CC-400HF HiFlo® comes with a variety of wand attachments to match your application. Add CoilShine® coil cleaner solution to clean even better!

OPTIONAL:

RCC-10-OIL: Pump Oil **Call for Price**

RCC-13: Extension hose, 12' **Call for Price**

QDN-LP25: Replacement Foaming Nozzle **Call for Price**

QDN-1510-Y: Replacement quick connect nozzle, 15° **Call for Price**

RCC-10-SK: Water Seal Kit **Call for Price**

//

The CC-400 has cut labor by 50% and left my customers downright impressed.

– **Service Project Manager**

..... //

FEATURES

- 400 PSI at 3 GPM
- Siphon tube to inject chemicals at 10:1 ratio
- 12' hose (additional 12' extension hoses available)
- 18" wand and two custom nozzles
- Wide variety of custom attachments
- On-board storage of cord and accessories
- Clean coils up to 8" thick

CC-400HF-60: HiFlo® Coil Cleaner, including 12' hose, spray gun, 3' sectional 3/8" diameter stainless steel condenser wand, 18" wand, two nozzles (soap and flat spray), and a 1 gallon bottle of CoilShine **Call for Price**

	CC-400HF
Motor Power	1 HP
Input Power	15 amps, 115V, 50/60 Hz AC
Power Supply Cord	25', 14-3 GFCI
Water Requirements	Minimum 20 PSI at 3 GPM
Output Water Pressure	400 PSI
Output Water Flow	3 GPM
Pump	Axial
Dimensions	13" high x 30" wide x 12" deep
Weight	45 lbs net dry



Call: 1-800-333-7467

Visit: www.goodway.com

Goodway Technologies Corporation

420 West Avenue, Stamford, CT 06902-6384 U.S.A.

Phone: 203-359-4708 • Fax: 203-359-9601 • goodway@goodway.com